


OPTIONAL HOSE ASSEMBLIES

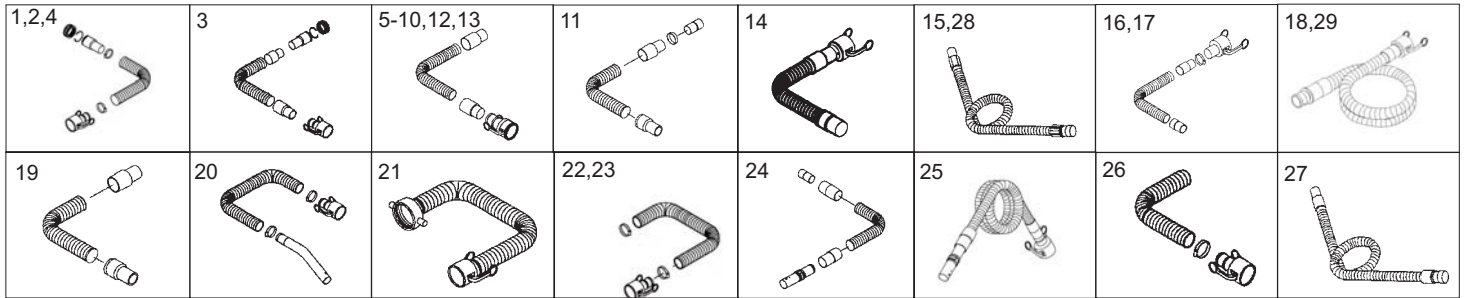


1	381427	Clear Urethane Suction Hose, SD*, with stainless steel female camlock and stainless steel female screw type. ø38mm x 3.8m. For model CD-1500 series
2	381427B	Clear Urethane Suction Hose Assembly, SD*, with ø38mm stainless steel female screw type connector for ø38mm accessories and stainless steel female camlock for ø50mm intake. ø38mm x 3.8m. For models CD-2600 CR, CD-3000 series
3	381430	Clear Urethane Suction Hose Assembly, SD*, with ø38mm female camlock and female screw type. ø38mm x 3.8m. For models 2D-11 DT MRP, 2D-14 (4W), BL-20 (DT) MFS, CS-11 (DT) MRP, CS-14 (4W) and CS-27 (TC)
4	381430B	Clear Urethane Suction Hose Assembly, SD*, for ø50mm camlock intake. ø38mm x 3.8m. For models 4D-14 (4W) and 4D-27 (TC)
5	381432	Clear Urethane Suction Hose Assembly, SD*, for ø38mm camlock intake. ø38mm x 7.5m
6	381432B	Clear Urethane Suction Hose Assembly, SD*, for ø50mm camlock intake. ø38mm x 7.5m
7	500395	Clear Urethane Suction Hose Assembly, SD*, for ø50mm camlock intake. ø50mm x 3.8m
8	500395B	Clear Urethane Suction Hose Assembly, SD*, with ø50mm female camlock and ø50mm hose cuff. ø50mm x 3.8m. For models CD-5000 series and 4D-11 (DT) MRP
9	500397	Clear Urethane Suction Hose Assembly, SD*, for ø50mm camlock intake. ø50mm x 7.5m
10	381137A	Crushproof Suction Hose with regular hose cuff. ø38mm x 3m. For models 2D-15 Hospital, 2D-15 (TC), 2D-16 (TC), 2D-25 (TC), CS-15 (TC) RE and CS-25 (TC) RE
11	381137B	Crushproof Suction Hose with swivel hose cuff. ø38mm x 3m. For models B-4 DS, B-7 DS, B-8, CS-4 RE, CS-7 RE and CS-8 RE
12	381137D	Crushproof Suction Hose Assembly. ø38mm x 3m. For model AV-20 DT (MFS) HEPA
13	381137G	PVC Crushproof Hose Assembly for ø50mm camlock intake. ø38mm x 3m. For 2D-20 (DT) & AV-20 (DT)
14	381138G	Crushproof Suction Hose with regular hose cuff. ø38mm x 4.5m. For model CS-55 Single Venturi
15	381475	Crushproof Suction Hose Assembly. 2.4m. For models AS-400 and AS-400 MR
16	383440	Crushproof Suction Hose Assembly, static conductive. For general purposes. Not recommended for conductive dusts. ø38mm x 3m. For model AVSD-20 DT (MFS) HEPA
17	383440B	Crushproof Suction Hose Assembly (no wire), static conductive, for ø50mm camlock intake. ø38mm x 3m. For model AVSD-35 (STD)
18	500131	Crushproof Suction Hose for use with ø50mm camlock intake. ø50mm x 4.5m. For models 4D-25 (TC), 4D-57 (TC), ECO-55 (4W), CS-55 Twin Venturi and 2D/CS-22 MR NUC HEPA
19	381140CB	Crushproof Suction Hose Assembly. ø38mm x 6m. For models CS-30 (CB) and CS-55 (CB)
20	323471	Foodgrade Suction Hose. Made of crystal clear PVC with stainless steel ends. Smooth interior and exterior allows for easy decontamination. Complies with FDA requirements (CFR Title 21 parts 170-199) & USDA chemically acceptable for food grade applications. ø32mm x 4.5m. For model 2D-15 Decom SS
21	381390B	Foodgrade Suction Hose Assembly with ø38mm stainless steel female screw type connector for ø38mm accessories and stainless steel female camlock for ø50mm suction intake. Made of crystal clear PVC with smooth interior and exterior. Meets FDA requirements. ø38mm x 3m. For model CS-3000 series.
22	381387	Vinylife Connection/Suction Hose with ø38mm female camlock on one end. To connect vacuum cleaner top-processing equipment. ø38mm x 1.8m. For models CD-1500 series, CD-2600 CR and CD-3000 series
23	500381	Vinylife Connection/Suction Hose with ø50mm female camlock on one end. To connect vacuum cleaner top-processing equipment. ø50mm x 1.8m. For models CD-2600 CR and CD-5000 series
24	323303	PVC Suction Hose with straight connector. Assembled with stainless steel ends. ø32mm x 3m. For Model B-4 DS Static Free
25	323540	PVC Suction Hose Assembly with straight handle and camlock. Stainless steel. ø32mm x 3m. For model CD-1500 series
26	381093	PVC Drain Hose. ø19mm x 1.5m
27	323500	Suction Hose. 2.4m. For model AS-5
28	381560	Suction Hose. ø38mm x 2.4m. For model AV-35 (STD)
29	381560B	Econo Suction Hose Assembly. For use with ø50mm camlock inlet. ø38mm x 2.4m

SD* - Static Dissipating

S/S** - Stainless Steel AISI 304

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE

OPTIONAL AIR SUPPLY HOSE ASSEMBLIES



1	211029C	Air Supply Hose, SD*, with Chicago/King fittings on one end and $\varnothing 25.4$ mm male NPT on other end. $\varnothing 12.7$ mm x 7.5m. For models AVSD-20 DT (MFS) HEPA and AVSD-35 (STD)	
2	211030	Air Supply Hose with quick disconnect fittings for single venturi. SD*. $\varnothing 12.7$ mm x 15m. For models CS-11 (DT)MRP, CS-14 (4W) and CS-27 (TC)	
3	211786	Air Supply Hose Assembly with male and female brass quick disconnects. $\varnothing 12.7$ mm x 7.5m	
4	211786C	Air Supply Hose with Chicago/King fitting on one end and $\varnothing 12.7$ mm male NPT on other end. $\varnothing 12.7$ mm x 7.5m. For models AV-20 DT (MFS) HEPA and AV-35 (STD)	
5	211787	Air Supply Hose Assembly with female quick disconnect. $\varnothing 12.7$ mm x 15m. For models CD-10000 STD series and CD-15000 STD series	
6	211030B	Air Supply Hose Assembly, SD*, with male NPT brass on both ends. $\varnothing 12.7$ mm x 15m	
7	211032	Air Supply Hose Assembly, SD*, with male and female quick disconnects. $\varnothing 25.4$ mm x 15m	
8	211032A	Air Supply Hose Assembly with $\varnothing 25.4$ mm male NPT brass on both ends. $\varnothing 25.4$ mm x 15m	
9	213983	Air Supply Hose Assembly with male and female brass quick disconnects. $\varnothing 25.4$ mm x 15m	
10	213984A	Air Supply Hose Assembly with $\varnothing 25.4$ mm male NPT fittings on each end. $\varnothing 25.4$ mm x 8.7m	
11	213984B	Air Supply Hose Assembly with $\varnothing 25.4$ mm male NPT fittings on each end. $\varnothing 25.4$ mm x 12.6m	

OPTIONAL HOSE ONLY (Sold by the foot in 1.5 meter increments)


1	250010	Crushproof Suction Hose, SC*** (no wire), $\varnothing 25.4$, black	
	323430	Crushproof Suction Hose, SC*** (no wire), $\varnothing 32$ mm, black	
	383438	Crushproof Suction Hose, SC*** (no wire), $\varnothing 38$ mm black	
	500538	Crushproof Suction Hose, SC*** (no wire), $\varnothing 50$ mm, black	
2	323340A	Crushproof Suction Hose, $\varnothing 32$ mm, beige	
	323340	Crushproof Suction Hose, $\varnothing 32$ mm, grey	
	381141	Crushproof Suction Hose, $\varnothing 38$ mm	
	500140	Crushproof Suction Hose, $\varnothing 50$ mm	
3	323440	Clear Urethane Suction Hose, SD*, $\varnothing 32$ mm	
	381425	Clear Urethane Suction Hose, SD*, $\varnothing 38$ mm	
	500390	Clear Urethane Suction Hose, SD*, $\varnothing 50$ mm	
	635078	Clear Urethane Suction Hose, SD*, $\varnothing 64$ mm	
	990010	Clear Urethane Suction Hose, SD*, $\varnothing 100$ mm	
4	381388	Foodgrade Suction Hose, $\varnothing 38$ mm	
5	211785	Air Supply Hose, $\varnothing 12.7$ mm, red	
	211785C	Air Supply Hose, $\varnothing 25.4$ mm, red	

SD* - Static Dissipating

S/S** - Stainless Steel AISI 304

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE

OPTIONAL HOSE ACCESSORIES

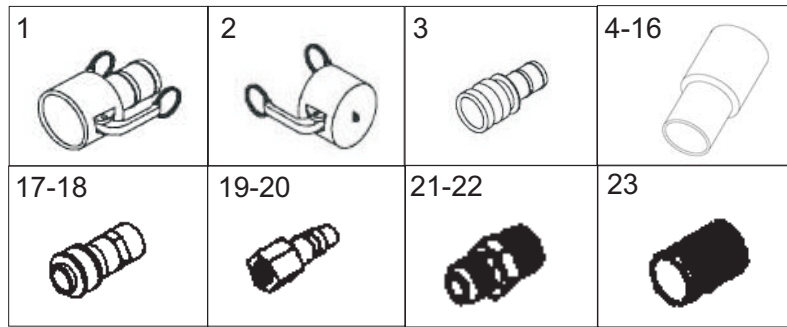

1	381097	Camlock Part C, female connector with hose shank, ø19mm. Aluminum	
	213160	Camlock Part C, female adaptor with hose shank, ø25.4mm Aluminum	
	381229	Camlock Part C, female adaptor, ø38mm. Aluminum	
	381233	Camlock Special Part C, ø38mm female adaptor with ø19mm hose shank. Aluminum	
	381233B	Camlock Special Part C, ø38mm female adaptor with ø25.4mm hose shank. Aluminum	
	500163	Camlock Part C, ø50mm, female with ø50mm hose shank. Aluminum	
	500175	Camlock Special Part C, ø50mm female adaptor to ø38mm hose shank. Aluminum	
	500338	Camlock Special Part C, ø64mm female camlock DC modified to ø50mm tube hose shank. Aluminum	
	635009	Camlock Special Part C, ø64mm adaptor with ø50mm hose shank. Aluminum	
	635010	Camlock Part C, female adaptor with hose shank, ø64mm. Aluminum	
	760020	Camlock Part C, ø76mm. Aluminum	
	212457	Camlock Part C, female adaptor with hose shank, ø100mm. Aluminum	
	990101	Camlock Special Part C, ø100mm female coupler with ø50mm hose barb. Aluminum	
2	381230	Camlock Part DC (Dust Cap), ø38mm. Aluminum	
	211114	Camlock Part DC (Dust Cap), latched, ø50mm. Aluminum	
	635008	Camlock Part DC (Dust Cap), ø64mm. Aluminum	
	212455	Camlock Part DC (Dust Cap), ø100mm. Aluminum	
3	213162	Camlock Part E (for extensions), male adaptor with hose shank, ø25.4mm. Aluminum	
	381326	Camlock Part E (for extensions), ø38mm. Aluminum	
	500343	Camlock Part E (for extensions), ø50mm male camlock with ø50mm hose shank. Aluminum	
4	250012	Hose Cuff, static conductive. ø25.4mm. Black	
5	250014	Expander Hose Cuff, static conductive. ø25.4mm to ø38mm. Black	
6	323324A	Hose Cuff. ø32mm. Grey PVC	
7	323324B	Hose Cuff. ø32mm. Beige	
8	323325A	Hose Cuff Expander. ø32mm to ø38mm. Grey	
9	323325B	Hose Cuff Expander. ø32mm to ø38mm. Beige	
10	323432	Hose Cuff, static conductive. ø32mm. Black	
11	323434	Expander Hose Cuff, static conductive. ø32mm to ø38mm. Black	
12	383435	Expander Hose Cuff, static conductive. ø38mm to ø50mm. Black	
13	383436	Hose Cuff, static conductive. ø38mm. Black	
14	383437	Swivel Hose Cuff, static conductive. ø38mm. Black	
15	500166	Hose Cuff Reducer. ø50mm to ø38mm. Grey	
16	500536	Hose Cuff, static conductive. ø50mm. Black	
17	211033B	Female Quick Disconnect with ø12.7mm female thread. ø12.7mm. Brass	
18	211034B	Female Quick Disconnect with ø25.4mm female thread. ø25.4mm. Brass	
19	211033A	Male Quick Disconnect with ø12.7mm female thread. ø12.7mm. Brass	
20	211034	Male Quick Disconnect with ø25.4mm female thread. ø25.4mm. Brass	
21	211788	Adaptor with hose barb and male threads. ø12.7mm. Brass	
22	213971	Fitting. ø25.4mm NPT x ø25.4mm hose barb. Brass	
23	211095C	Hex Nipple. ø12.7mm NPT. Brass.	

SD* - Static Dissipating

S/S** - Stainless Steel AISI 304

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE